
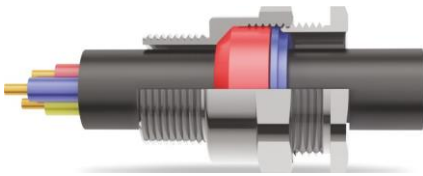


# A2F Type Single Compression Cable Gland

## MM-EX-A2F-20S16 1M B2 (M20)

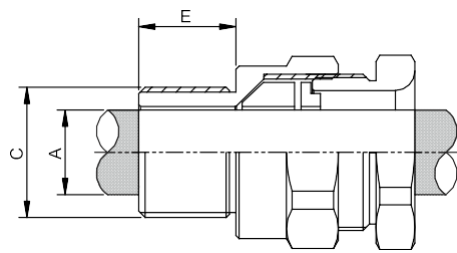

### CABLE GLAND SIZE DETAILS

<b>Type</b>	A2F Type Single Compression Cable Gland
<b>Cable Types</b>	Unarmoured
<b>Application</b>	For indoor and outdoor use with all types of unarmoured cable where it is essential to provide IP66 or IP68 protection on the outer sheath of cable for circular, Unarmoured plastic or rubber sheathed cables.
<b>Option thread</b>	Metric
<b>Gland Material</b>	Brass Nickle Plate (BNP)
<b>IP Rating</b>	IP66 & IP68

<b>Gas Group</b>	II C
<b>EPL (Equipment Protection Level)</b>	Zone 1, Zone 2 Gb, Gc, Gas Zone 21, Zone 22, Db, Dc Dust

<b>Sealing Ring</b>	Single Compression Sealing
<b>Operating Temperature</b>	Silicone Seals: IECEx/ATEX-55°C ≤ Ta ≤ +160°C EAC-60°C ≤ Ta ≤ +130°C
<b>Finish</b>	Natural Brass or Nickel Plated
<b>Accessories</b>	PVC Shroud, Lock Nut, Earth Tag, Serrated Washer, Adaptor / Reducer

**CODE** MM-EX-A2F-20S16 1M B2 (M20)

**CABLE GALND SIZE** 20S16

**ENTRT THREAD "C"**  
**METRIC** M20

**THREAD LEGTH "E"**  
**METRIC** 17

**CABLE DIAMETER "A"**  
**MIN** 3.2  
**MAX** 8.5

**HEX SIZE**  
**M : MAX** 24  
**N : MAX** 26.5

**IECEx Certificate No.** ECEX PRE 20.0124X  
**ATEX Certificate No.** Presafe 20 ATEX 48906X  
**EAC Certificate No.** RU C-IN.AA71.B.00212/20  
**PESO Certificate No.** P538496/4  
**Protection Type** Ex d, Ex e, Ex t

---

- \* Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)
- \* All the dimensions given are in Millimeters (mm)
- \* Can be also provided in Kit Packing as per requirement