
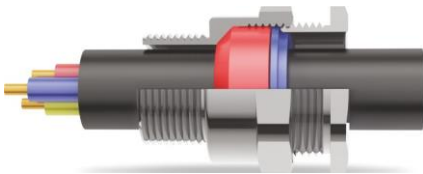


A2F Type Single Compression Cable Gland

MM-EX-A2F-20S16 1M X6 (M20)

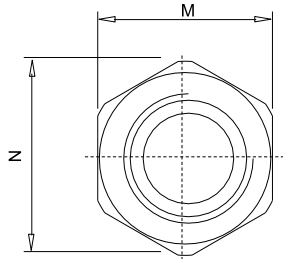

CABLE GLAND SIZE DETAILS

Type	A2F Type Single Compression Cable Gland	CODE	MM-EX-A2F-20S16 1M X6 (M20)
Cable Types	Unarmoured	CABLE GALND SIZE	20S16
Application	For indoor and outdoor use with all types of unarmoured cable where it is essential to provide IP66 or IP68 protection on the outer sheath of cable for circular, Unarmoured plastic or rubber sheathed cables.	ENTRT THREAD "C"	
		METRIC	M20
Option thread	Metric	THREAD LEGTH "E"	
Gland Material	Stainless Steel (SS316L)	METRIC	17
IP Rating	IP66 & IP68	CABLE DIAMETER "A"	
Gas Group	II C	MIN	3.2
EPL (Equipment Protection Level)	Zone 1, Zone 2 Gb, Gc, Gas Zone 21, Zone 22, Db, Dc Dust	MAX	8.5
Sealing Ring	Single Compression Sealing	HEX SIZE	
Operating Temperature	Silicone Seals: IECEx/ATEX-55°C ≤ Ta ≤ +160°C EAC-60°C ≤ Ta ≤ +130°C	M : MAX	24
Finish	Natural Brass or Nickel Plated	N : MAX	26.5
Accessories	PVC Shroud, Lock Nut, Earth Tag, Serrated Washer, Adaptor / Reducer		

IECEx Certificate No. ECEX PRE 20.0124X
ATEX Certificate No. Presafe 20 ATEX 48906X
EAC Certificate No. RU C-IN.AA71.B.00212/20
PESO Certificate No. P538496/4
Protection Type Ex d, Ex e, Ex t

- * Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)
- * All the dimensions given are in Millimeters (mm)
- * Can be also provided in Kit Packing as per requirement