
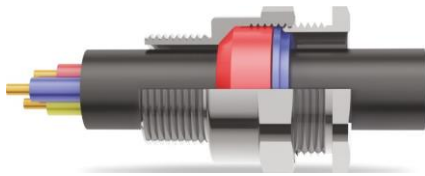


A2F Type Single Compression Cable Gland

MM-EX-A2F-20S16 1N B2 (1/2" NPT)

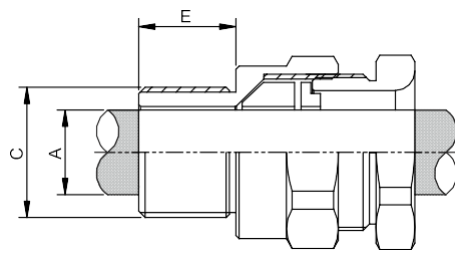

CABLE GLAND SIZE DETAILS

Type	A2F Type Single Compression Cable Gland	CODE	MM-EX-A2F-20S16 1N B2
Cable Types	Unarmoured		(1/2" NPT)
Application	For indoor and outdoor use with all types of unarmoured cable where it is essential to provide IP66 or IP68 protection on the outer sheath of cable for circular, Unarmoured plastic or rubber sheathed cables.	CABLE GALND SIZE	20S16
Option thread	NPT	ENTRT THREAD "C"	
Gland Material	Brass Nickle Plate (BNP)	NPT	1/2"
IP Rating	IP66 & IP68	THREAD LEGTH "E"	
		NPT	20
Gas Group	II C	CABLE DIAMETER "A"	
EPL (Equipment Protection Level)	Zone 1, Zone 2 Gb, Gc, Gas Zone 21, Zone 22, Db, Dc Dust	MIN	3.2
		MAX	8.5
Sealing Ring	Single Compression Sealing	HEX SIZE	
Operating Temperature	Silicone Seals: IECEx/ATEX-55°C ≤ Ta ≤ +160°C EAC-60°C ≤ Ta ≤ +130°C	M : MAX	24
Finish	Natural Brass or Nickel Plated	N : MAX	26.5
Accessories	PVC Shroud, Lock Nut, Earth Tag, Serrated Washer, Adaptor / Reducer		

IECEx Certificate No. ECEX PRE 20.0124X
ATEX Certificate No. Presafe 20 ATEX 48906X
EAC Certificate No. RU C-IN.AA71.B.00212/20
PESO Certificate No. P538496/4
Protection Type Ex d, Ex e, Ex t

- * Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)
- * All the dimensions given are in Millimeters (mm)
- * Can be also provided in Kit Packing as per requirement