
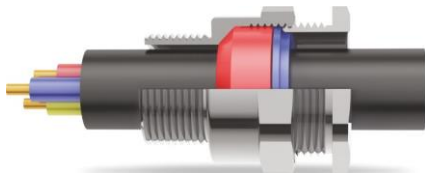
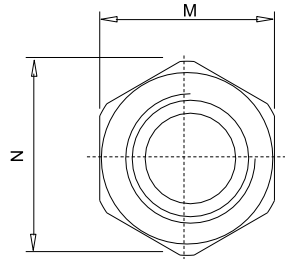


A2F Type Single Compression Cable Gland

MM-EX-A2F-20S 1M B2 (M20)

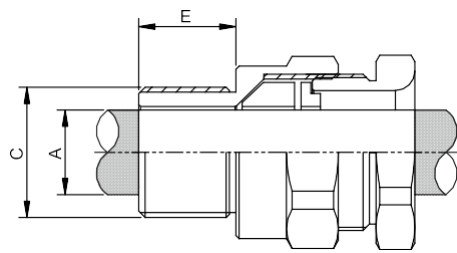

CABLE GLAND SIZE DETAILS

Type	A2F Type Single Compression Cable Gland
Cable Types	Unarmoured
Application	For indoor and outdoor use with all types of unarmoured cable where it is essential to provide IP66 or IP68 protection on the outer sheath of cable for circular, Unarmoured plastic or rubber sheathed cables.
Option thread	Metric
Gland Material	Brass Nickle Plate (BNP)
IP Rating	IP66 & IP68

CODE MM-EX-A2F-20S 1M B2 (M20)

CABLE GALND SIZE 20S

ENTRT THREAD "C"
METRIC M20

THREAD LEGTH "E"
METRIC 17

Gas Group	II C
EPL (Equipment Protection Level)	Zone 1, Zone 2 Gb, Gc, Gas Zone 21, Zone 22, Db, Dc Dust

CABLE DIAMETER "A"
MIN 6.2
MAX 11.6

Sealing Ring	Single Compressoin Sealing
Operating Temperature	Silicone Seals: IECEx/ATEX-55°C ≤ Ta ≤ +160°C EAC-60°C ≤ Tas +130°C
Finish	Natural Brass or Nickel Plated
Accessories	PVC Shroud, Lock Nut, Earth Tag, Serrated Washer, Adaptor Reducer

HEX SIZE
M : MAX 24
N : MAX 26.5

IECEx Certificate No. ECEX PRE 20.0124X
ATEX Certificate No. Presafe 20 ATEX 48906X
EAC Certificate No. RU C-IN.AA71.8.00212/20
PESO Certificate No. P538496/4
Protection Type Ex d, Ex e, Ext

- * Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)
- * All the dimensions given are in Millimeters (mm)
- * Can be also provided in Kit Packing as per requirement