
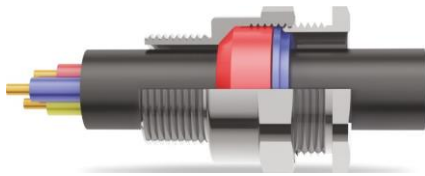
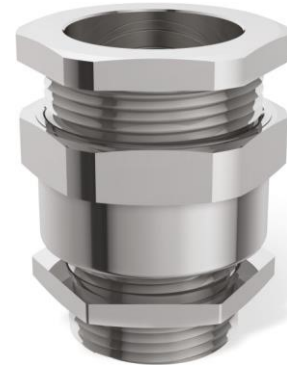


A2F Type Single Compression Cable Gland

MM-EX-A2F-20 1M X6 (M20)

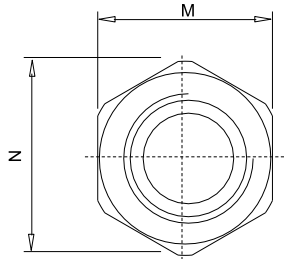

CABLE GLAND SIZE DETAILS

| | | | |
|---|---|---------------------------|--------------------------|
| Type | A2F Type Single Compression Cable Gland | CODE | MM-EX-A2F-20 1M X6 (M20) |
| Cable Types | Unarmoured | CABLE GALND SIZE | 20 |
| Application | For indoor and outdoor use with all types of unarmoured cable where it is essential to provide IP66 or IP68 protection on the outer sheath of cable for circular, Unarmoured plastic or rubber sheathed cables. | ENTRT THREAD "C" | |
| | | METRIC | M20 |
| Option thread | Metric | THREAD LEGTH "E" | |
| Gland Material | Stainless Steel (SS316L) | METRIC | 17 |
| IP Rating | IP66 & IP68 | CABLE DIAMETER "A" | |
| Gas Group | II C | MIN | 8.0 |
| EPL (Equipment Protection Level) | Zone 1, Zone 2 Gb, Gc, Gas Zone 21, Zone 22, Db, Dc Dust | MAX | 13.9 |
| Sealing Ring | Single Compression Sealing | HEX SIZE | |
| Operating Temperature | Silicone Seals: IECEx/ATEX-55°C ≤ Ta ≤ +160°C EAC-60°C ≤ Ta ≤ +130°C | M : MAX | 27 |
| Finish | Natural Brass or Nickel Plated | N : MAX | 30 |
| Accessories | PVC Shroud, Lock Nut, Earth Tag, Serrated Washer, Adaptor / Reducer | | |

IECEx Certificate No. ECEX PRE 20.0124X
ATEX Certificate No. Presafe 20 ATEX 48906X
EAC Certificate No. RU C-IN.AA71.B.00212/20
PESO Certificate No. P538496/4
Protection Type Ex d, Ex e, Ex t

- * Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)
- * All the dimensions given are in Millimeters (mm)
- * Can be also provided in Kit Packing as per requirement