
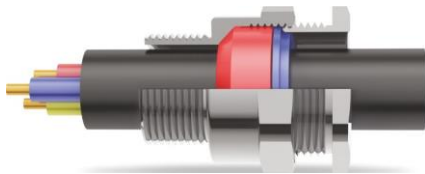


# A2F Type Single Compression Cable Gland

## MM-EX-A2F-20 1N X6 (1/2" NPT)

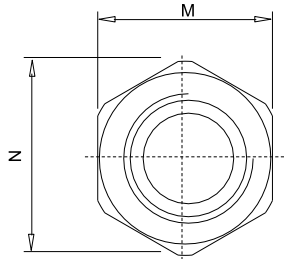

### CABLE GLAND SIZE DETAILS

<b>Type</b>	A2F Type Single Compression Cable Gland	<b>CODE</b>	MM-EX-A2F-20 1N X6 (1/2" NPT)
<b>Cable Types</b>	Unarmoured	<b>CABLE GALND SIZE</b>	20
<b>Application</b>	For indoor and outdoor use with all types of unarmoured cable where it is essential to provide IP66 or IP68 protection on the outer sheath of cable for circular, Unarmoured	<b>ENTRT THREAD "C"</b>	<b>NPT</b>
	1/2"	<b>THREAD LEGTH "E"</b>	<b>NPT</b> 20
<b>Option thread</b>	NPT	<b>CABLE DIAMETER "A"</b>	<b>MIN</b> 8.0
<b>Gland Material</b>	Stainless Steel (SS316L)	<b>MAX</b>	13.9
<b>IP Rating</b>	IP66 & IP68	<b>HEX SIZE</b>	<b>M : MAX</b> 27
<b>Gas Group</b>	II C	<b>N : MAX</b>	30
<b>EPL (Equipment Protection Level)</b>	Zone 1, Zone 2 Gb, Gc, Gas Zone 21, Zone 22, Db, Dc Dust		
<b>Sealing Ring</b>	Single Compression Sealing		
<b>Operating Temperature</b>	Silicone Seals: IECEx/ATEX-55°C ≤ Ta ≤ +160°C EAC-60°C ≤ Ta ≤ +130°C		
<b>Finish</b>	Natural Brass or Nickel Plated		
<b>Accessories</b>	PVC Shroud, Lock Nut, Earth Tag, Serrated Washer,		

Adaptor / Reducer

**IECEx Certificate No.** ECEX PRE 20.0124X  
**ATEX Certificate No.** Presafe 20 ATEX 48906X  
**EAC Certificate No.** RU C-IN.AA71.B.00212/20  
**PESO Certificate No.** P538496/4  
**Protection Type** Ex d, Ex e, Ex t

---

- \* Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)
- \* All the dimensions given are in Millimeters (mm)
- \* Can be also provided in Kit Packing as per requirement