
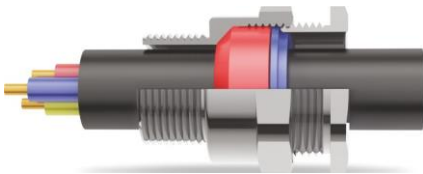



A2F Type Single Compression Cable Gland

MM-EX-A2F-50S 5M B2 (M50)

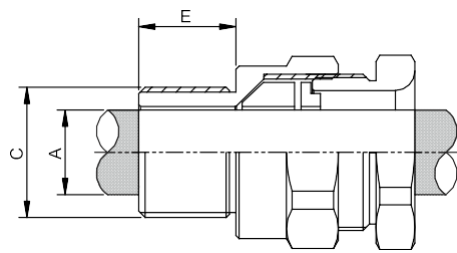

CABLE GLAND SIZE DETAILS

Type A2F Type Single Compression Cable Gland
Cable Types Unarmoured
Application For indoor and outdoor use with all types of unarmoured cable where it is essential to provide IP66 or IP68 protection on the outer sheath of cable for circular, Unarmoured plastic or rubber sheathed cables.

Option thread Metric
Gland Material Brass Nickle Plate (BNP)
IP Rating IP66 & IP68

Gas Group II C
EPL (Equipment Protection Level) Zone 1, Zone 2 Gb, Gc, Gas
 Zone 21, Zone 22, Db, Dc Dust

Sealing Ring Single Compression Sealing
Operating Temperature Silicone Seals: IECEx/ATEX-55°C ≤ Ta ≤ +160°C
 EAC-60°C ≤ Ta ≤ +130°C

Finish Natural Brass or Nickel Plated
Accessories PVC Shroud, Lock Nut, Earth Tag, Serrated Washer, Adaptor / Reducer

CODE MM-EX-A2F-50S 5M B2 (M50)

CABLE GALND SIZE 50

ENTRT THREAD "C"
METRIC M50

THREAD LEGTH "E"
METRIC 17

CABLE DIAMETER "A"
MIN 31.1
MAX 37.5

HEX SIZE
M : MAX 55
N : MAX 60

IECEX Certificate No. ECEX PRE 20.0124X
ATEX Certificate No. Presafe 20 ATEX 48906X
EAC Certificate No. RU C-IN.AA71.B.00212/20
PESO Certificate No. P538496/4
Protection Type Ex d, Ex e, Ex t

- * Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)
- * All the dimensions given are in Millimeters (mm)
- * Can be also provided in Kit Packing as per requirement