
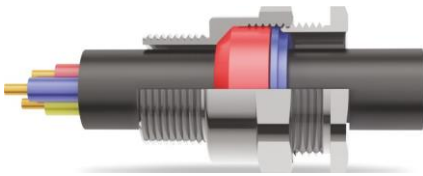


A2F Type Single Compression Cable Gland

MM-EX-A2F-90 8M B2 (M90)

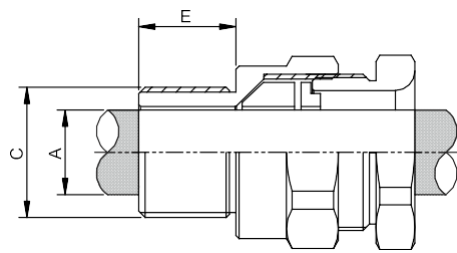

CABLE GLAND SIZE DETAILS

Type	A2F Type Single Compression Cable Gland
Cable Types	Unarmoured
Application	For indoor and outdoor use with all types of unarmoured cable where it is essential to provide IP66 or IP68 protection on the outer sheath of cable for circular, Unarmoured plastic or rubber sheathed cables.
Option thread	Metric
Gland Material	Brass Nickle Plate (BNP)
IP Rating	IP66 & IP68

Gas Group	II C
EPL (Equipment Protection Level)	Zone 1, Zone 2 Gb, Gc, Gas Zone 21, Zone 22, Db, Dc Dust

Sealing Ring	Single Compression Sealing
Operating Temperature	Silicone Seals: IECEx/ATEX-55°C ≤ Ta ≤ +160°C EAC-60°C ≤ Ta ≤ +130°C
Finish	Natural Brass or Nickel Plated
Accessories	PVC Shroud, Lock Nut, Earth Tag, Serrated Washer, Adaptor / Reducer

CODE MM-EX-A2F-90 8M B2 (M90)

CABLE GALND SIZE 90

ENTRT THREAD "C"
METRIC M90

THREAD LEGTH "E"
METRIC 24

CABLE DIAMETER "A"
MIN 66.7
MAX 79.2

HEX SIZE
M : MAX 108
N : MAX 116

IECEx Certificate No. ECEX PRE 20.0124X
ATEX Certificate No. Presafe 20 ATEX 48906X
EAC Certificate No. RU C-IN.AA71.B.00212/20
PESO Certificate No. P538496/4
Protection Type Ex d, Ex e, Ex t

- * Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)
- * All the dimensions given are in Millimeters (mm)
- * Can be also provided in Kit Packing as per requirement