


# Adaptor

## NPT to Metric



### MM-EX-AD7N7M X6 (2 1/2"NPT to M75)

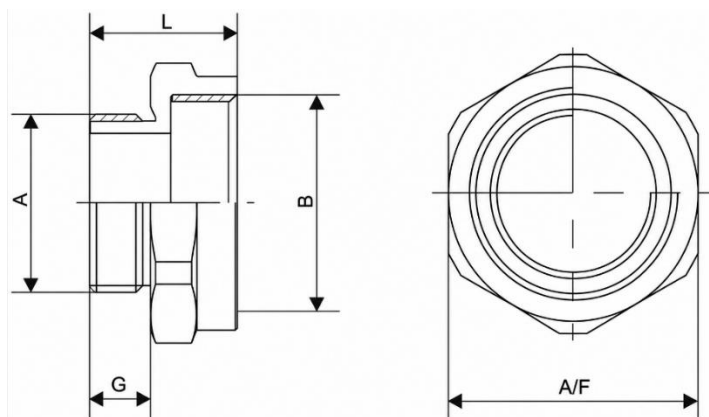

#### Reducer

|                              |                                                         |
|------------------------------|---------------------------------------------------------|
| <b>IP Rating</b>             | IP68                                                    |
| <b>IECEx Certificate No.</b> | IECEx PRE 20.0123X                                      |
| <b>ATEX Certificate No.</b>  | Presafe 20 ATEX 24571X                                  |
| <b>EAC Certificate No.</b>   | RU C-IN.AA71.B.00212/20                                 |
| <b>PESO Certificate No.</b>  | P538496/2                                               |
| <b>Thread Type</b>           | NPT to Metric                                           |
| <b>Protection Type</b>       | Ex d, Ex e, Ex t                                        |
| <b>Material</b>              | Stainless Steel (SS316L)                                |
| <b>Ambient Temperature</b>   | IECEx/ATEX-55°C ≤ Ta ≤ +160°C<br>EAC-60°C ≤ Ta ≤ +130°C |

#### NPT to Metric Thread

|             |                                    |
|-------------|------------------------------------|
| <b>CODE</b> | MM-EX-AD7N7M X6 (2 1/2"NPT to M75) |
| <b>A</b>    | 2 1/2"                             |
| <b>B</b>    | M75X1.5                            |
| <b>L</b>    | 65                                 |
| <b>A/F</b>  | 41                                 |
| <b>G</b>    | 80                                 |

\* Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)