


E1W Double Compression Cable Gland



MM-EX-E1W16 0M X6 (M16)

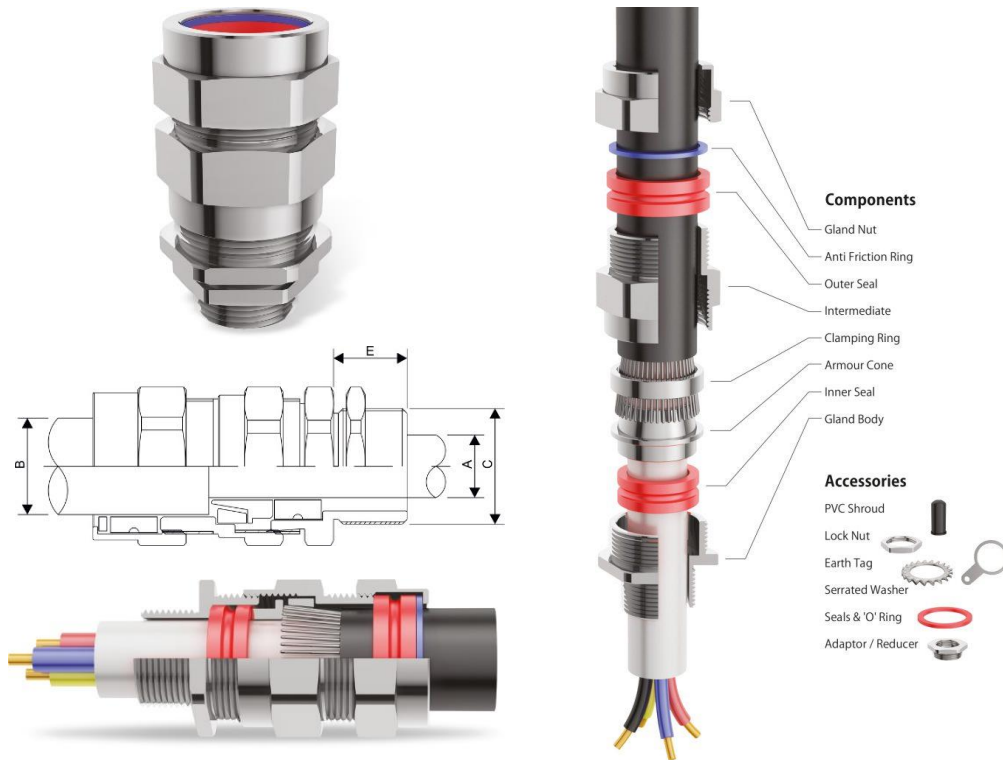

Double Compression Cable Gland For Armoured Cables

CABLE GLAND SIZE DETAILS

Type	E1W Double Compression Cable Gland
Cable Types	Armoured (Steel wire armour (SWA) Aluminium wire armour (AWA)
Application	For use with all types of SWA cable for Indoor and outdoor application. Used in applications where it is essential to provide an IP66 seal on the outer sheath. Armour lock with separate armour locking ring, ideal for checking electrical continuity
Standard	BS6121: Part 1: 2005. EN50262
Option thread	Metric
Gland Material	Stainless Steel (304 or 316L)
IP Rating	IP66

CODE	MM-EX-E1W16 0M X6 (M16)
CABLE GLAND SIZE	16
Metric	M16x1.5
Thread Length "E"	10
Cable Diameter "A"	
MIN	8.80
MAX	11.60

Sealing Method	Double Compression Sealing (Sealing on both Outer and Inner Sheath)	Cable Diameter "B"	
Operating Temperature	Standard Seals (Nitrile): -20°C TO 80°C. On Request (Silicone): -50°C To +160°C	MIN	11.80
Finish	Natural Brass or Nickel Plated or Electroless Nickel Plated	MAX	15.40
Accessories	PVC Shroud, SLSF Shroud, Lock Nut, Earth Tag, Serrated Washer, Adaptor / Reducer.	Across Flat	24
		Across Corner	26

-
- * Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)
 - * All the dimensions given are in Millimeters (mm)
 - * Can be also provided in Kit Packing as per requirement