


E1W Double Compression Cable Gland



MM-EX-E1W25S 2M X6 (M25)

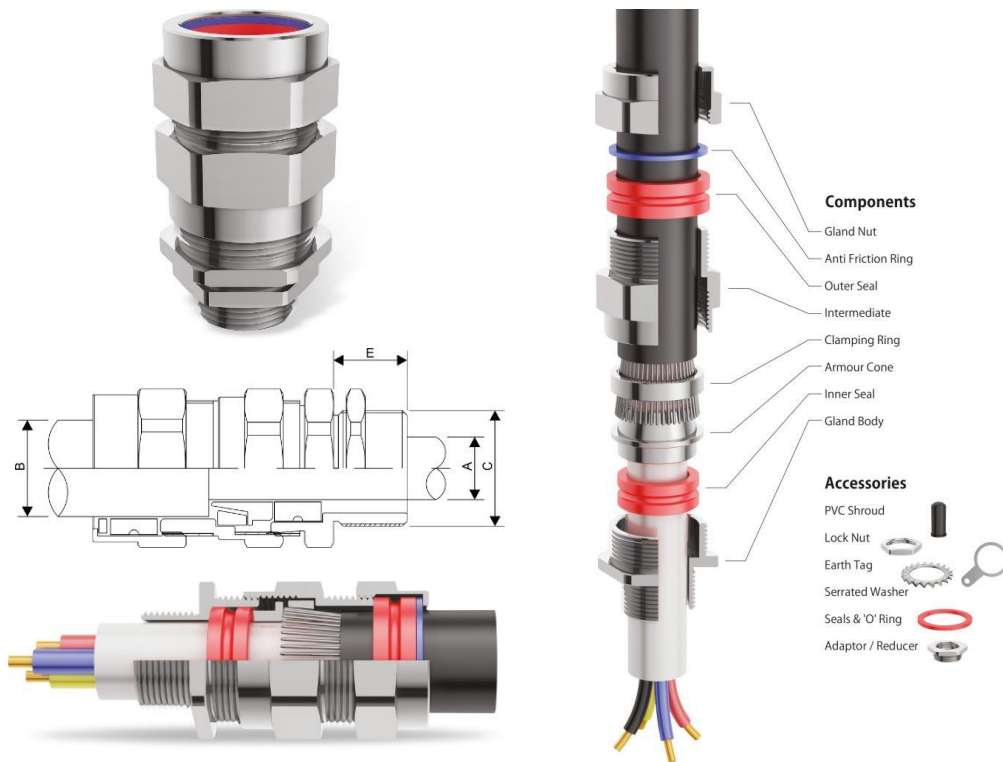

Double Compression Cable Gland For Armoured Cables

CABLE GLAND SIZE DETAILS

Type	E1W Double Compression Cable Gland
Cable Types	Armoured (Steel wire armour (SWA) Aluminium wire armour (AWA))
Application	For use with all types of SWA cable for Indoor and outdoor application. Used in applications where it is essential to provide an IP66 seal on the outer sheath. Armour lock with separate armour locking ring, ideal for checking electrical continuity
Standard	BS6121: Part 1: 2005. EN50262
Option thread	Metric
Gland Material	Stainless Steel (304 or 316L)
IP Rating	IP66

CODE	MM-EX-E1W25S 2M X6 (M25)
CABLE GLAND SIZE	25S
Metric	M25x1.5
Thread Length "E"	10
Cable Diameter "A"	
MIN	13.30
MAX	16.80

Sealing Method	Double Compression Sealing (Sealing on both Outer and Inner Sheath)	Cable Diameter "B"	
Operating Temperature	Standard Seals (Nitrile): -20°C TO 80°C. On Request (Silicone): -50°C To +160°C	MIN	18.20
Finish	Natural Brass or Nickel Plated or Electroless Nickel Plated	MAX	23.50
Accessories	PVC Shroud, SLSF Shroud, Lock Nut, Earth Tag, Serrated Washer, Adaptor / Reducer.	Across Flat	32
		Across Corner	35.50

-
- * Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)
 - * All the dimensions given are in Millimeters (mm)
 - * Can be also provided in Kit Packing as per requirement