


E1W Double Compression Cable Gland



MM-EX-E1W50L 5M X6 (M50)

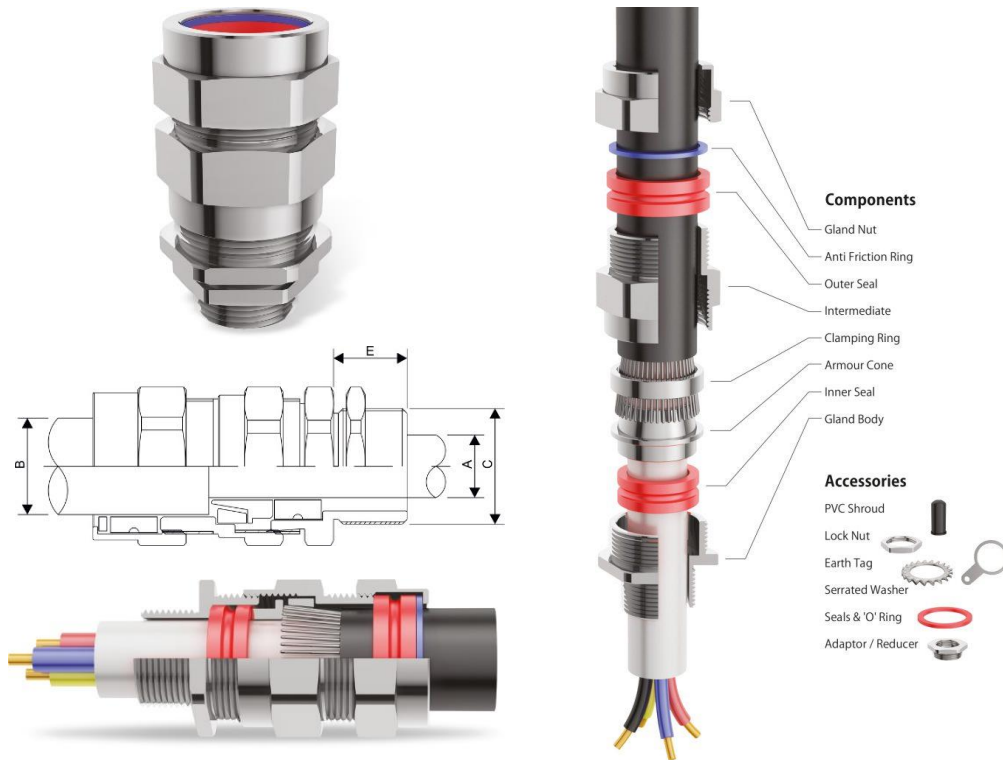

Double Compression Cable Gland For Armoured Cables

CABLE GLAND SIZE DETAILS

Type	E1W Double Compression Cable Gland	CODE	MM-EX-E1W50L 5M X6 (M50)
Cable Types	Armoured (Steel wire armour (SWA) Aluminium wire armour (AWA))	CABLE GLAND SIZE	50L
Application	For use with all types of SWA cable for Indoor and outdoor application. Used in applications where it is essential to provide an IP66 seal on the outer sheath. Armour lock with separate armour locking ring, ideal for checking electrical continuity	Metric Thread Length "E"	M50x1.5 15
Standard	BS6121: Part 1: 2005. EN50262	Cable Diameter "A"	
Option thread	Metric	MIN	38
Gland Material	Stainless Steel (304 or 316L)	MAX	44.50

IP Rating	IP66		
Sealing Method	Double Compression Sealing (Sealing on both Outer and Inner Sheath)	Cable Diameter "B"	
Operating Temperature	Standard Seals (Nitrile): -20°C TO 80°C. On Request (Silicone): -50°C To +160°C	MIN	45.80
Finish	Natural Brass or Nickel Plated or Electroless Nickel Plated	MAX	52.80
Accessories	PVC Shroud, SLSF Shroud, Lock Nut, Earth Tag, Serrated Washer, Adaptor / Reducer.	Across Flat	65.50
		Across Corner	73

* Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)

* All the dimensions given are in Millimeters (mm)

* Can be also provided in Kit Packing as per requirement