


E1W Double Compression Cable Gland



MM-EX-E1W90L 8M X6 (M90)

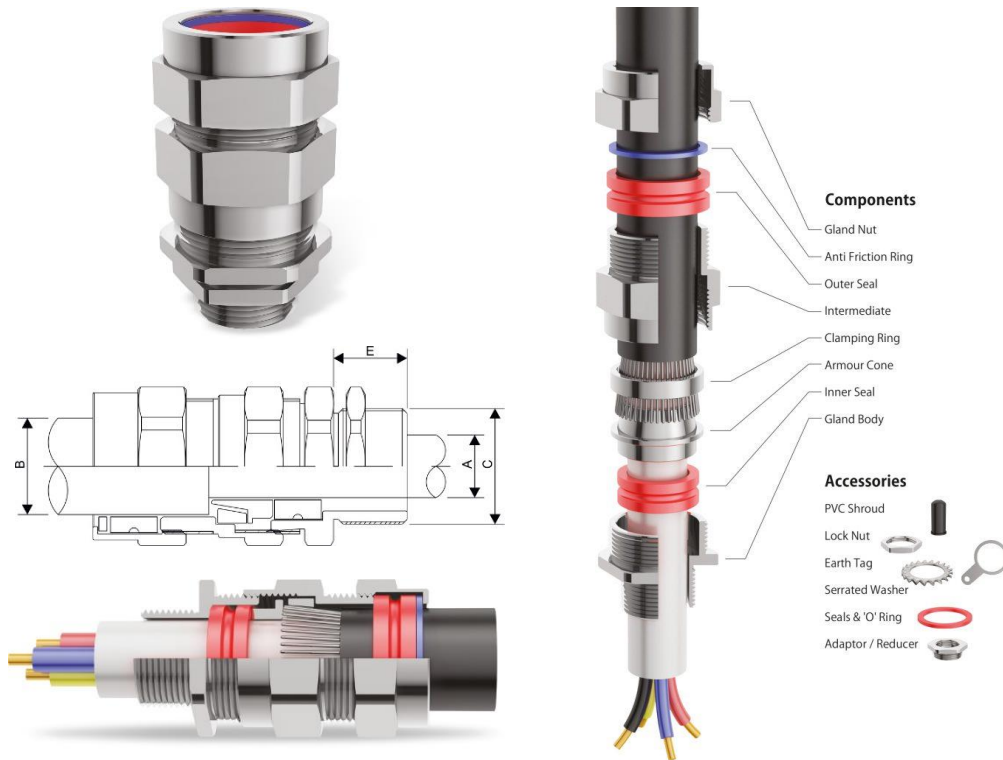

Double Compression Cable Gland For Armoured Cables

CABLE GLAND SIZE DETAILS

Type	E1W Double Compression Cable Gland	CODE	MM-EX-E1W90L 8M X6 (M90)
Cable Types	Armoured (Steel wire armour (SWA) Aluminium wire armour (AWA))	CABLE GLAND SIZE	90L
Application	For use with all types of SWA cable for Indoor and outdoor application. Used in applications where it is essential to provide an IP66 seal on the outer sheath. Armour lock with separate armour locking ring, ideal for checking electrical continuity	Metric	M90x1.5
Standard	BS6121: Part 1: 2005. EN50262	Thread Length "E"	20
Option thread	Metric	Cable Diameter "A"	
Gland Material	Stainless Steel (304 or 316L)	MIN	67
		MAX	78.50

IP Rating	IP66		
Sealing Method	Double Compression Sealing (Sealing on both Outer and Inner Sheath)	Cable Diameter "B"	
Operating Temperature	Standard Seals (Nitrile): -20°C TO 80°C.	MIN	78.50
Finish	On Request (Silicone): -50°C To +160°C Natural Brass or Nickel Plated or Electroless Nickel Plated	MAX	91
Accessories	PVC Shroud, SLSF Shroud, Lock Nut, Earth Tag, Serrated Washer, Adaptor / Reducer.	Across Flat	104
		Across Corner	114.50

* Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)

* All the dimensions given are in Millimeters (mm)

* Can be also provided in Kit Packing as per requirement