


## Reducer

### NPT to NPT Thread



## MM-EX-RD7N5N X6 (2.1/2"NPT to 1.1/2"NPT)

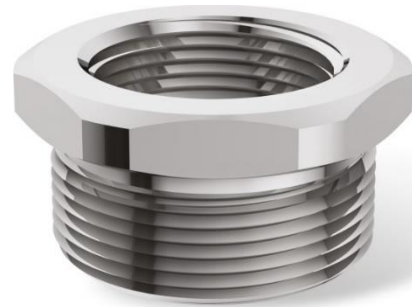

#### Reducer

|                       |                                                         |
|-----------------------|---------------------------------------------------------|
| IP Rating             | IP68                                                    |
| IECEx Certificate No. | IECEx PRE 20.0123X                                      |
| ATEX Certificate No.  | Presafe 20 ATEX 24571X                                  |
| EAC Certificate No.   | RU C-IN.AA71.B.00212/20                                 |
| PESO Certificate No.  | P538496/2                                               |
| Thread Type           | NPT to NPT                                              |
| Protection Type       | Ex d, Ex e, Ex t                                        |
| Material              | Stainless Steel (SS304/SS316L)                          |
| Ambient Temperature   | IECEx/ATEX-55°C ≤ Ta ≤ +160°C<br>EAC-60°C ≤ Ta ≤ +130°C |

#### NPT to NPT Thread

**CODE** MM-EX-RD7N5N X6 (2.1/2"NPT to 1.1/2"NPT)

|            |        |
|------------|--------|
| <b>A</b>   | 2 1/2" |
| <b>B</b>   | 1 1/2" |
| <b>L</b>   | 51     |
| <b>A/F</b> | 80     |
| <b>G</b>   | 41     |

\* Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)