


# Reducer

## Metric to NPT Thread



### MM-EX-RD9M8N B2 (M100X1.5 to 3"NPT)

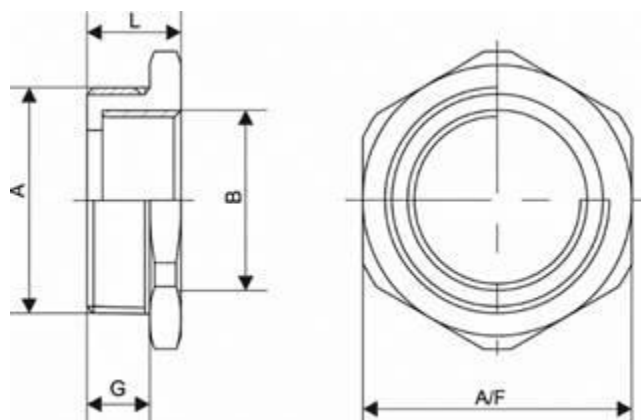

#### Reducer

|                       |                                                         |
|-----------------------|---------------------------------------------------------|
| IP Rating             | IP68                                                    |
| IECEX Certificate No. | IECEX PRE 20.0123X                                      |
| ATEX Certificate No.  | Presafe 20 ATEX 24571X                                  |
| EAC Certificate No.   | RU C-IN.AA71.B.00212/20                                 |
| PESO Certificate No.  | P538496/2                                               |
| Thread Type           | Metric to NPT                                           |
| Protection Type       | Ex d, Ex e, Ex t                                        |
| Material              | Brass Nickle Plated (BNP)                               |
| Ambient Temperature   | IECEX/ATEX-55°C ≤ Ta ≤ +160°C<br>EAC-60°C ≤ Ta ≤ +130°C |

#### Metric to NPT Thread

**CODE** MM-EX-RD9M8N B2 (M100X1.5 to 3"NPT)

|            |          |
|------------|----------|
| <b>A</b>   | M100X1.5 |
| <b>B</b>   | 3"       |
| <b>L</b>   | 32       |
| <b>A/F</b> | 110      |
| <b>G</b>   | 22       |

\* Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)