



# Reducer

## NPT to NPT Thread

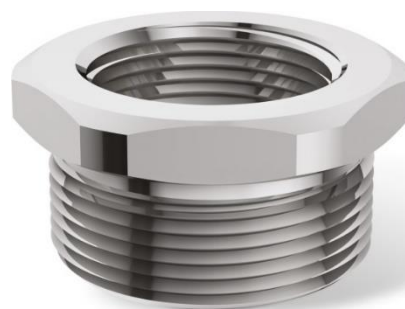

### MM-EX-RD9N7N X6 (4"NPT to 2.1/2"NPT)

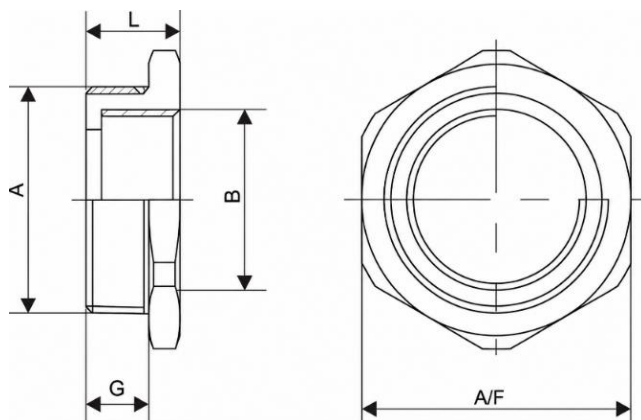

#### Reducer

|                       |                                                         |
|-----------------------|---------------------------------------------------------|
| IP Rating             | IP68                                                    |
| IECEx Certificate No. | IECEx PRE 20.0123X                                      |
| ATEX Certificate No.  | Presafe 20 ATEX 24571X                                  |
| EAC Certificate No.   | RU C-IN.AA71.B.00212/20                                 |
| PESO Certificate No.  | P538496/2                                               |
| Thread Type           | NPT to NPT                                              |
| Protection Type       | Ex d, Ex e, Ex t                                        |
| Material              | Stainless Steel (SS304/SS316L)                          |
| Ambient Temperature   | IECEx/ATEX-55°C ≤ Ta ≤ +160°C<br>EAC-60°C ≤ Ta ≤ +130°C |

#### NPT to NPT Thread

|      |                                      |
|------|--------------------------------------|
| CODE | MM-EX-RD9N7N X6 (4"NPT to 2.1/2"NPT) |
| A    | 4"                                   |
| B    | 2 1/2"                               |
| L    | 57                                   |
| A/F  | 120                                  |
| G    | 45                                   |

\* Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)