
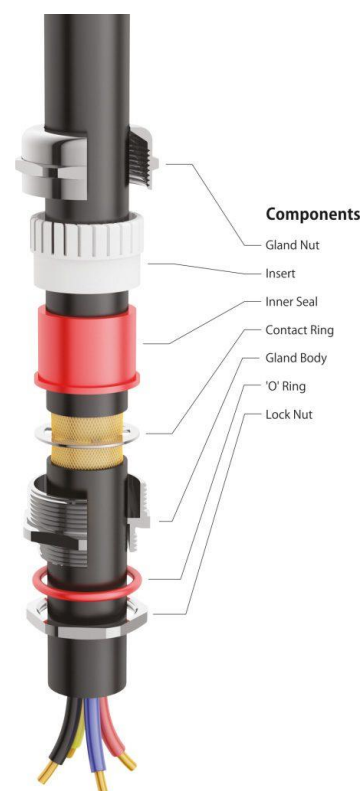


# IP 68 Metric Threaded Single Compression Cable Gland

## MM-M40-32 X6 (M40)

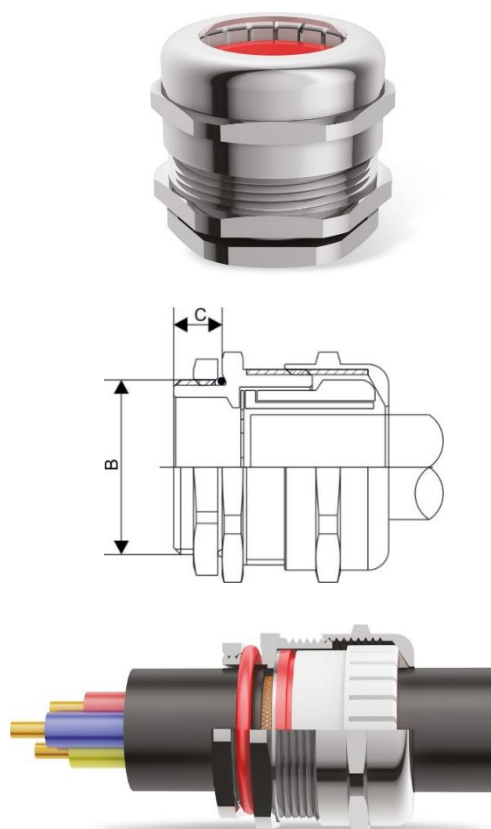

### CABLE GLAND SIZE DETAILS

|                       |                                                         |
|-----------------------|---------------------------------------------------------|
| <b>Type</b>           | IP 68 Metric Threaded<br>Single Compression Cable Gland |
| <b>Cable Types</b>    | Unarmoured                                              |
| <b>Option thread</b>  | Metric                                                  |
| <b>Gland Material</b> | Stainless Steel (SS316L)                                |
| <b>IP Rating</b>      | IP68                                                    |

**Operating Temperature** Standard Seals: -20°C to +90°C

|                    |                                                                                             |
|--------------------|---------------------------------------------------------------------------------------------|
| <b>Finish</b>      | Nickel Plated                                                                               |
| <b>Accessories</b> | Matching Accessories available like PVS Shrouds,<br>Lock Nuts & "O" Ring as per requirement |

**CODE** MM-M40-32 X6 (M40)

**CABLE SIZE METRIC** M40

**THREAD SIZE "B"**  
**METRIC** M40

**THREAD LENGTH "C"**  
**SHORT** 8  
**LONG** 15

| MATERIAL GRADE CONFIGURATIONS |                                                                                |
|-------------------------------|--------------------------------------------------------------------------------|
| UL94V0                        | PVC Insert : Nylon 66<br>Rubber seal : Neoprene (FR)<br>O Ring : Neoprene (FR) |
| High Temperature              | PVC Insert : PVDF<br>Rubber seal : Viton<br>O Ring : Viton                     |
| Regular Application           | PVC Insert : Nylon 6<br>Rubber seal : EPDM<br>O Ring : NBR                     |

ACROSS FLAT 50

CABLE RANGE "A"  
MIN 22  
MAX 32

- 
- \* Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)
  - \* All the dimensions given are in Millimeters (mm)
  - \* Can be also provided in Kit Packing as per requirement