
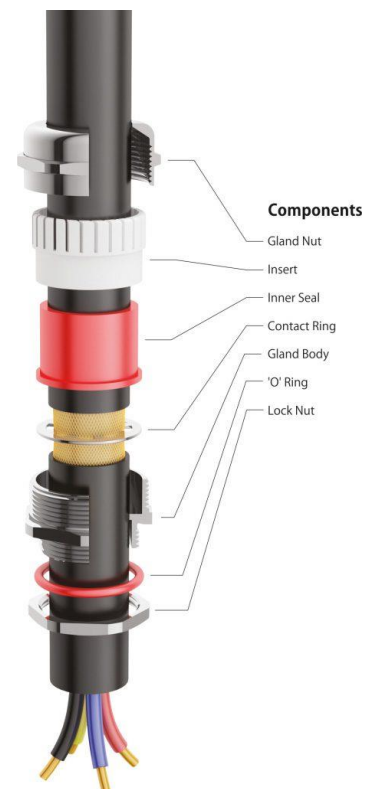


IP 68 Metric Threaded Single Compression Cable Gland

CE IP68

MM-M12-6.5 X6 (M12)

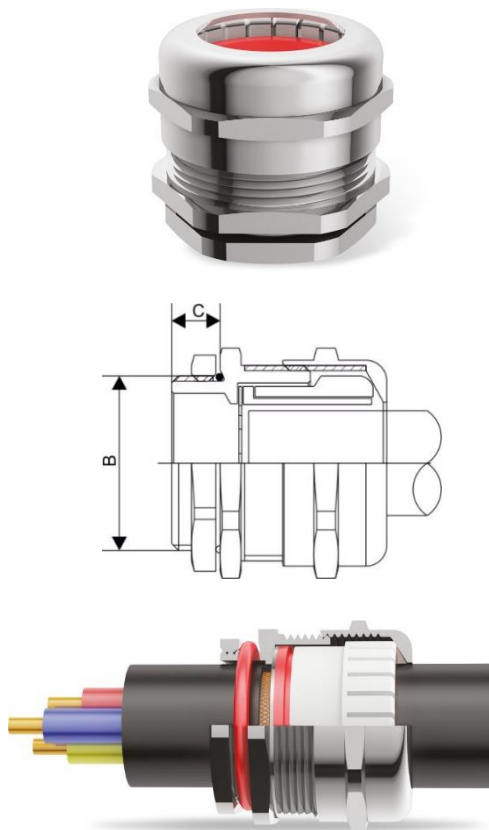

CABLE GLAND SIZE DETAILS

Type	IP 68 Metric Threaded Single Compression Cable Gland	CODE	MM-M12-6.5 X6 (M12)
Cable Types	Unarmoured	CABLE SIZE METRIC	M12
Option thread	Metric	THREAD SIZE "B"	
Gland Material	Stainless Steel (SS316L)	METRIC	M12
IP Rating	IP68		
Operating Temperature	Standard Seals: -20°C to +90°C		
Finish	Nickel Plated	THREAD LENGTH "C"	
Accessories	Matching Accessories available like PVS Shrouds, Lock Nuts & "O" Ring as per requirement	SHORT	6
		LONG	10

MATERIAL GRADE CONFIGURATIONS	
UL94V0	PVC Insert : Nylon 66 Rubber seal : Neoprene (FR) O Ring : Neoprene (FR)
High Temperature	PVC Insert : PVDF Rubber seal : Viton O Ring : Viton
Regular Application	PVC Insert : Nylon 6 Rubber seal : EPDM O Ring : NBR

ACROSS FLAT	14
CABLE RANGE "A"	
MIN	3
MAX	6.50

-
- * Degrees of protection (IP Code) : IP66 / IP68 (1.5 meter, 2 Hours)
 - * All the dimensions given are in Millimeters (mm)
 - * Can be also provided in Kit Packing as per requirement